


Flag female disconnects PA

Messing (Cu)

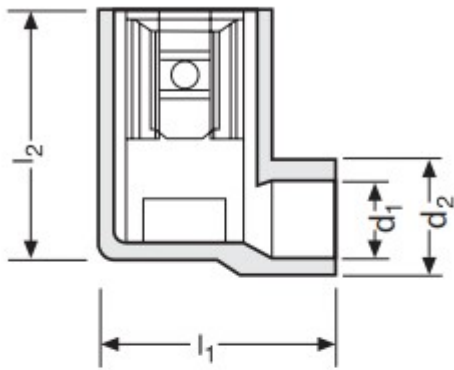

Querschnitt
(in mm²)

Steckgröße
Breite x Dicke

Farbe

Abmessungen (in mm)

dimensions (mm)

in

wire Size

tab size

colour

l1

l2

d1

d2

pa

0,5 - 1,0

4,8 x 0,5



14,0

15,0

4,5

6,5

0,5 - 1,0

4,8 x 0,8



14,0

15,0

4,5

6,5

0,5 - 1,5

6,3 x 0,8



15,0

15,5

4,5

6,5

1,5 - 2,5

4,8 x 0,5



14,0

15,2

4,5

6,5

1,5 - 2,5

4,8 x 0,8



14,0

15,2

4,5

6,5

1,5 - 2,5

6,3 x 0,8



15,0

15,5

4,5

6,5

Vollisolierte Winkelflachsteckhülsen PA

Zn), metallische Isolationsunterst. Cu-ETP, galv. Sn
mit aufgeweiteter PA-Isolation -easy entry-
Dauertemperaturbereich: -55°C bis 105°C



material: CuZn, Cu-ETP, e-plate Sn
insulation: PA -easy entry-
temperature range: -55°C up to 105°C



VE
Stück
ck qty.

Gewicht
kg/100 Stk.

Bestell-Nr.

weight

part no.

1000	0,115	101286*
1000	0,118	101287*
1000	0,124	101280
1000	0,120	101288*
1000	0,122	101289*
1000	0,126	101282